COMMERCIAL SERIES FULL INVERTER HEAT PUNP

ຼ



SCAN FOR MORE INFO



Stylish Marine Grade Anti-Corrosion Weatherproof Aluminium Alloy Casing

Full Stepless TurboSilence[®] Inverter Technology

TurboSilence[®] technology utilises the inverter compressor and heat exchanger technology to maximise the COP.

2-In-1 Heating And Cooling System


Heats up to 40°C and cools down to 12°C, to suit year round applications.

Smart And Quick Defrosting Mode

Automatically switches to defrosting mode when frost accumulation is detected during operation. Includes manual defrosting function for on-demand control.

300% More Efficient

The Neptune Heat Pump's soft start feature steadily increases power to maximise energy savings.

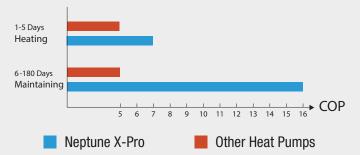

Mitsubishi Full Inverter Compressor

The Mitsubishi full inverter compressor is the market leader, renowned for its outstanding quality, reliability and energy efficiency.

Operating Range -20°C ~ 43°C

Capable of working in extreme conditions, from as low as -20°C up to 43°C.

COP of 15.8 (1kW energy = 15.8kW heat)

The Neptune X-Pro Commercial Series stands out for its exceptional energy efficiency, with a COP of 15.8. It generates 15.8kW of heat for every 1kW of power consumed.



R32 Environmentally Friendly Gas

30% more environmentally friendly and approximately 10% reduction in electricity consumption compared to other commonly used refrigerants.



Solar PV Compatible

Save money and connect your Neptune X-Pro Heat Pump to your Solar Power System.



Intuitive Display

Experience total control with real-time power consumption display and an intuitive interface offering customisable settings and data at your fingertips.

Wi-Fi Connectivity

Seamlessly connect to Wi-Fi for smart functionality, making comfort management effortless.

Inverter Life App

Manage your heat pump efficiently with the Inverter Life app. Control your heat pump anywhere, any time.





3 INTELLIGENT MODES

Turbo Mode -20%~120% heating capacity to quickly heat your pool to the desired temperature.

Smart Mode – 20%~100% heating capacity. Intelligent maintenance of pool temperature with optimum heating capacity and energy savings.

Silence Mode – Intelligent adjustment when maintaining temperature. 20%~60% heating capacity to maintain the desired temperature with less noise.



Up To 15 x Quieter

The compressor and side discharge fan work at a very low speed when maintaining the temperature, reducing the noise level around 42 dB(A) at 1m.



PERFORMANCE CONDITIONS

Model	NHX603	NHX1203	
Performance Condition: Air 26°C, Wa	ater 26°C, Humidity 80%		
Heating Capacity (kW)	59.0	118.0	
СОР	15.7	15.8	
Performance Condition: Air 15°C, Wa	ater 26°C, Humidity 70%		
Heating Capacity (kW)	41.0	80.0	
СОР	7.8	7.4	
Performance Condition: Air 7°C, Wat	er 26°C, Humidity 90%		
Heating Capacity (kW)	31.8	61.0	
СОР	4.7	3.9	
Performance Condition: Air -15°C, W	ater 26°C, Humidity 70%		
Heating Capacity (kW)	20.0	41.0	
СОР	2.9	3.0	
Performance Condition: Air 35°C, Wa	ater 28°C, Humidity 80%		
Cooling Capacity (kW)	27.0	49.0	

TECHNICAL DATA

Model	NHX603	NHX1203	
Operating Range	-20°C ~ 43°C		
Compressor	Twin-Rotary Mitsubishi DC Inverter		
Heat Exchanger	Spiral Titanium Tube in PVC		
Casing	Marine Grade, Anti-Corrosion, Weatherproof, Aluminium Alloy		
Fan Direction	Horizontal		
Sound Level at 1m dB(A)	42.1 ~ 54.4	43.3 ~ 58.5	
Sound Level at 10m dB(A)	22.1 ~ 34.4	23.3 ~ 38.5	
Power Supply	400V/3Ph/50Hz		
Rated Input Power at air 15°C (kW)	1.4 ~ 8.94	2.6 ~ 17.1	
Rated Input Current at air 15°C (A)	2.02 ~ 12.9	3.75~24.7	
Max Input Current (A)	19.0	42.0	
Water Pipe Diameter (mm)	65	80	
Pool Pump Water Flow (L/min)	333 ~ 416	500 ~ 666	
Net Dimensions LxWxH (mm)	1545x458x1630	2108x640x2040	
Net Weight (kg)	217	476	

















www.neptuneheating.com.au

AVAILABLE FROM YOUR LOCAL POOL PRO STOCKIST

